



12"
with 90°
Outlet

RO MEMBRANE HOUSING

- NSF listed component
- Manufactured from an FDA-approved polypropylene
- Accommodates most 12" membrane elements
- 90° angle outlet

The PENTEK® RO Membrane Housing is manufactured in the U.S.A. from a high-quality, FDA-approved polypropylene.


This component is NSF listed and will accommodate most standard 12" membrane elements.

Both the ribbed cap and the housing are one-piece injection molded parts, requiring no solvents or glues to be used in the manufacturing process. The ribbed cap incorporates acme square threads and two o-rings to ensure a leak-proof seal.

The RO Membrane Housings have a straight inlet and are equipped with (2) 90° outlets. The 90° outlets eliminate the need for additional elbows. All ports have standard 1/8" NPT threads.



RO MEMBRANE Housing

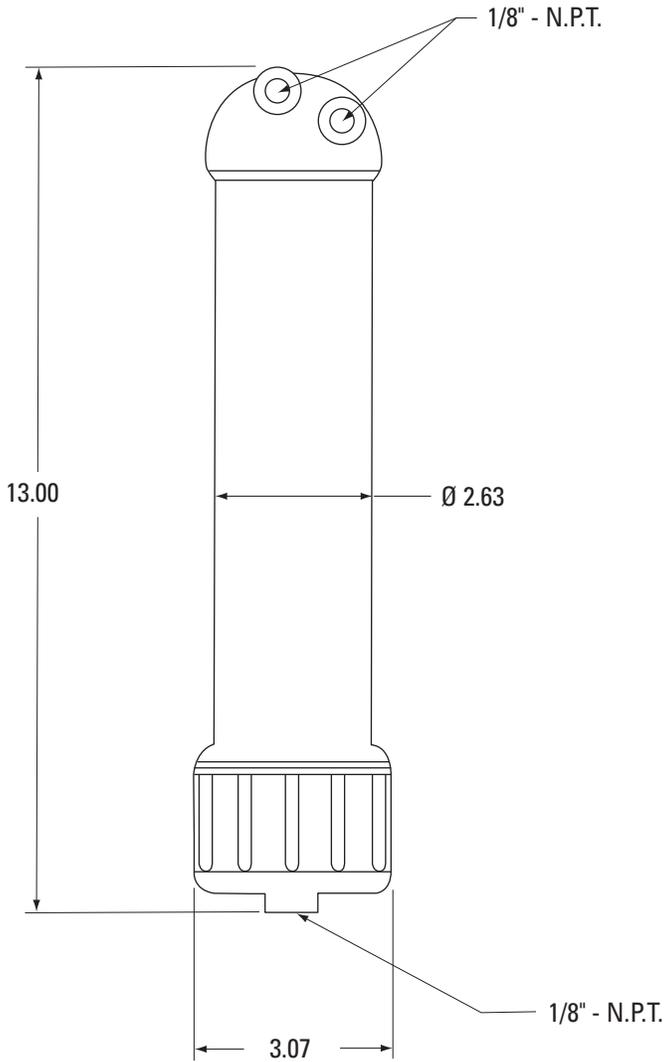

Materials of Construction

Housing	Reinforced Polypropylene
Finish	Reinforced Polypropylene
O-Ring	EPDM
Maximum Temperature	125°F (51.7°C)
Maximum Pressure	125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.

